



[www.schildr.global](http://www.schildr.global)



**DYNAMIC**

Retractable Glass Roof



# LIFT & SLIDE DOORS

Dynamic with  
Lift & Slide Doors  
Maximum Insulation

Thermal break Aluminum profile



# BIFOLD DOORS

Dynamic with  
Bifold Doors  
Maximum Openness

Thermal break Aluminum profile



# GUILLOTINE COMPACT


Dynamic with  
Guillotine Compact  
Vertical Sliding Door/Window

Thermal break Aluminum profile



# SLIDING GLASS

Dynamic with  
WD240-Sliding Doors  
Maximum Functionality



All Seasons



Resists bad weather



Fire retardant




Partial blackout



Dimmable LED lights



Remote controlled




Custom finishes




Built to last

Four seasons are habitable with DYNAMIC's high performance sealing that is resistant to harsh climatic conditions. The aesthetic appearance of the structure will improve the look of property without interfering with the landscape




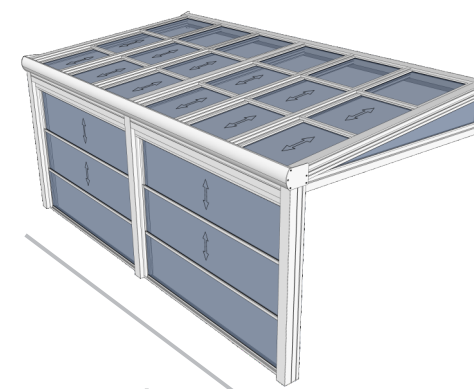


GE300

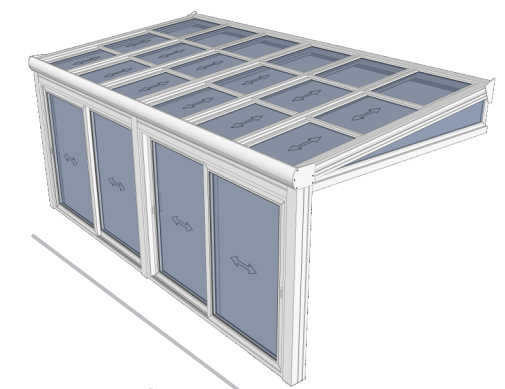


LS300

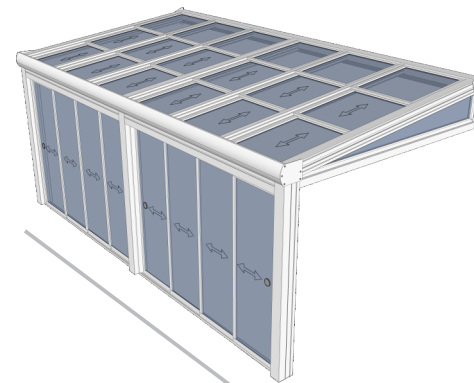


WD240

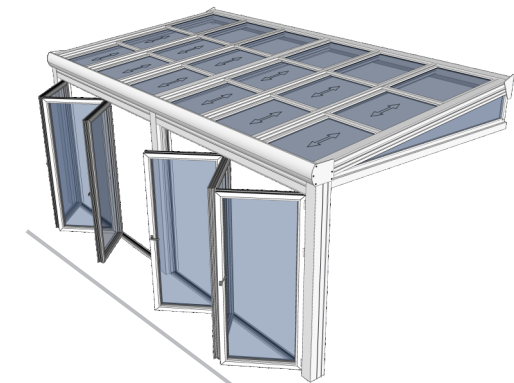


BIFOLD

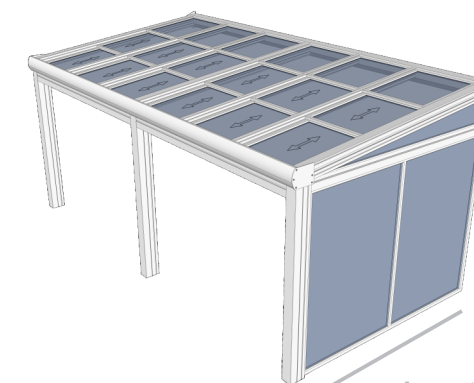


FX20

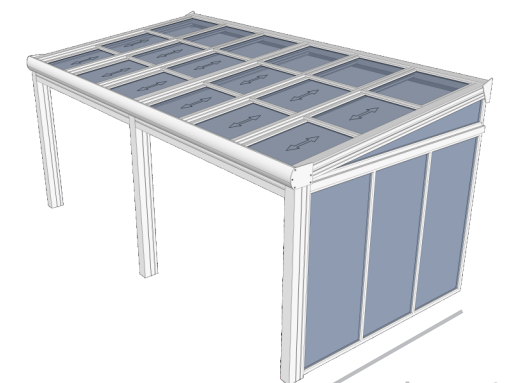

FX30

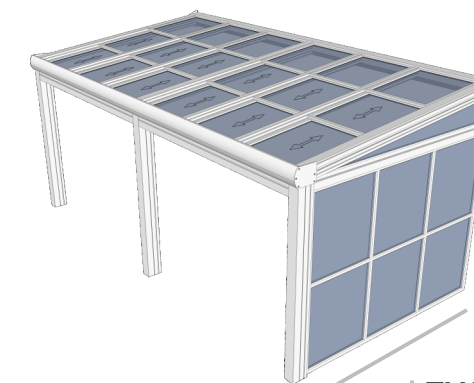

FX60

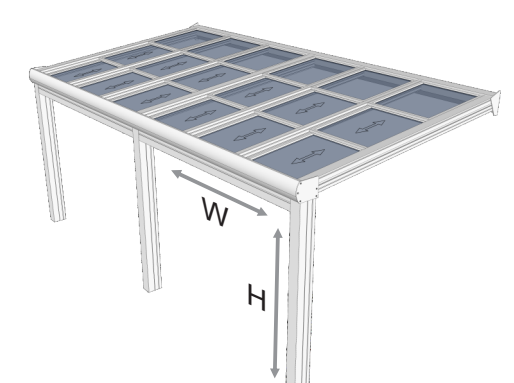

## RETRACTABLE GLASS ROOF

Dynamic is sunroom system with retractable glass roof panels. It can provide up to 75% sky openness. Heat insulated, remote controlled, its designed to provide functionality and durability in mind alongside maintaining an aesthetically pleasing look.

### Without any additional supporting steel structure:

- Up to 15' projection
- No restriction on width
- Can be attached to existing building

### Additional features include:

- Front posts with hidden built-in downspouts
- All low-E glass for better heat management
- Insulated glass
- Tempered on outer layer
- Tempered & laminated on inner layer
- Maximum sky openness of 66% or 75%

### APPLICATION

Rooftops, Conservatories,  
Greenery, Terraces, Pools



### WALL MOUNTED CONTROL

Connected Living

- Manually override control functions when necessary.
- Direct and simple approach to operating projection screens.
- Quick and easy connection and operation.



### 1-5 CHANNEL REMOTE CONTROL

Description


- Each channel can control an individual motorized product or a group of motorized products which provides practical and flexible control options.
- Multiple finishes
- Choose from white, silver, black or blue and white to fit your style and preference.
- Radio Technology Somfy




### 1-16 CHANNEL REMOTE CONTROL

Description


- Easy programming.
- Clear design with an on-screen display.
- Greater personalization.
- The "my" button allows to set a favorite position for an individual or a group of motorized applications for quick and easy access.
- For use with any Somfy motorized window coverings.

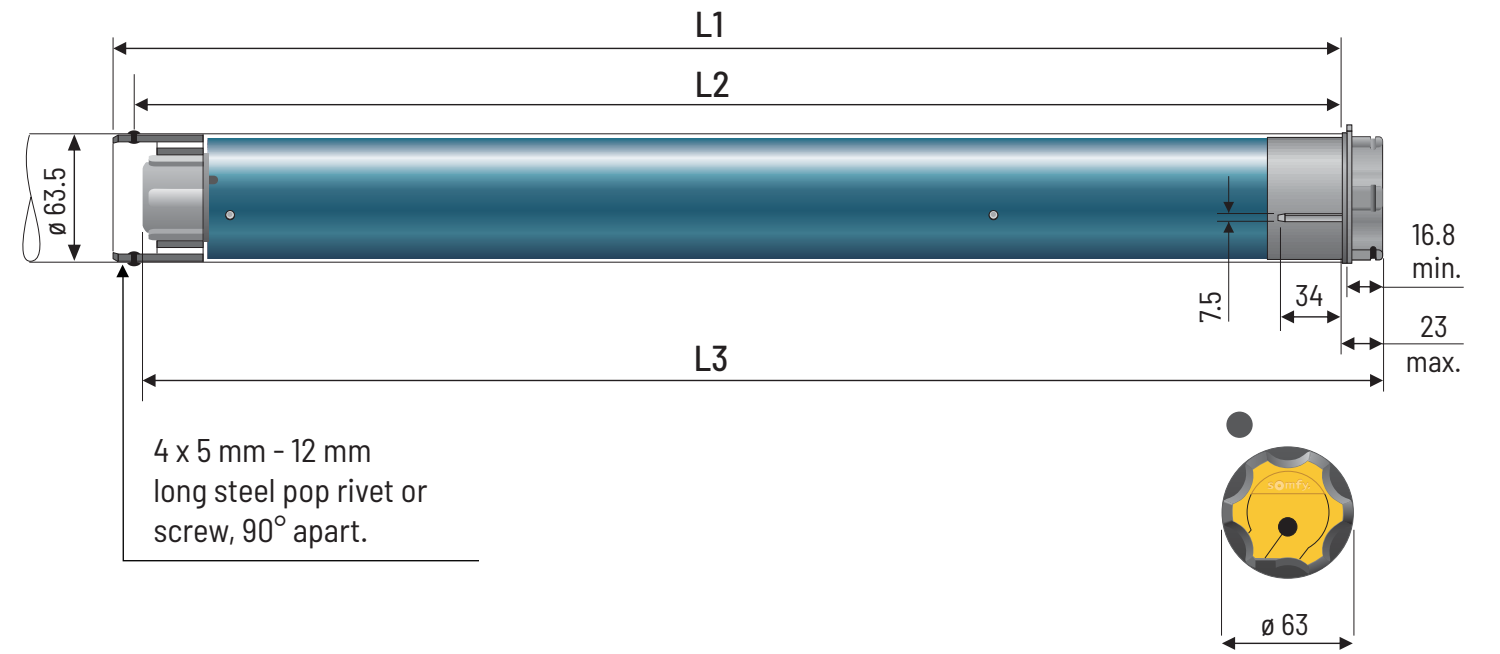

| SPECIFICATIONS     | 6100R2                |
|--------------------|-----------------------|
| Torque (in. lbs.)  | 100 Nm (880 in. lbs.) |
| Nominal Voltage    | 120V / 60Hz           |
| Rated Current      | 3.8A                  |
| Speed              | 14 rpm                |
| Thermal Protection | 4 minutes             |
| Radio Frequency    | 433.42 MHz            |
| Sound Level        | ≤ 67 dBA              |

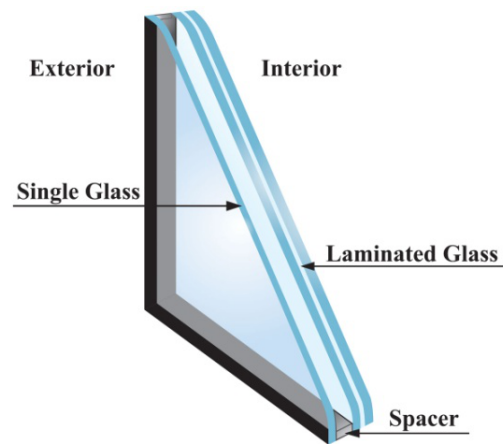


ALL GLASSES ARE TEMPERED

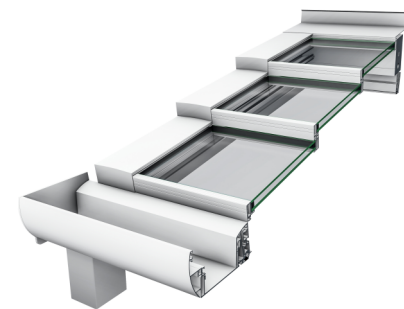


### DYNAMIC / WHITE

Standard frame color /ral 9010 textured (pulver) white

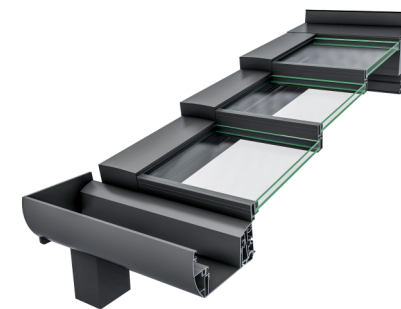

### DYNAMIC / ANTHRACITE

Standard frame color /ral 7016 textured (pulver) gray anthracite

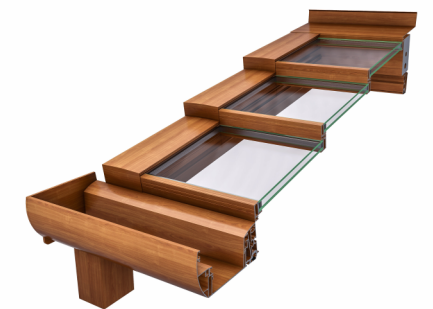

### DYNAMIC / WOOD FINISH

Wood finsh and other ral colors available upon special request



